

Calconduit™

Rigid Conduit, Rigid & EMT Fittings

Aluminum Rigid Factory Elbows - 45°

Application:

Aluminum Elbows are to be installed on conduit raceways for underground stub-ups, and interconnection of conduit runs and other fittings.

Features:


Fabricated from UL Listed Aluminum Conduit
 Each end threaded (NPT).
 Each end fitted with protective end cap

Certifications and Compliances:

- Made In USA
- A.R.R.A. Available
- ANSI C80.5
- WW-C-540c
- ASTM B332

Options:

Available in any degree of bend from 5° to 90°, and special radius

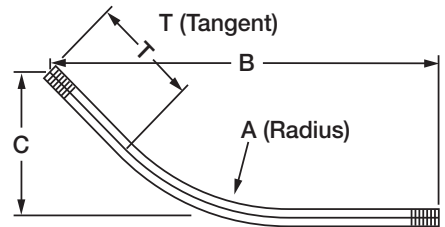

45° Elbows				Dimensions				
Item Number	Description	Wt. (lbs)	Box Qty	A	B	C	T	Cut Length
AR0545EL00	1/2" X 45°	0.20	50	4.0	7.0	2.9	1.9	8.0"
AR0745EL00	3/4" X 45°	0.30	50	4.5	7.4	3.0	2.0	9.0"
AR1045EL00	1" X 45°	0.50	25	5.8	9.5	4.0	2.7	10.0"
AR1245EL00	1-1/4" X 45°	0.90	20	7.3	13.1	5.4	4.3	15.5"
AR1545EL00	1-1/2" X 45°	1.20	15	8.3	14.0	5.8	4.3	16.5"
AR2045EL00	2" X 45°	1.60	10	9.5	16.1	6.6	5.4	18.5"
AR2545EL00	2-1/2" X 45°	3.90	50	10.5	19.0	7.9	6.8	22.5"
AR3045EL00	3" X 45°	5.50	35	13.0	20.5	8.5	6.7	23.5"
AR3545EL00	3-1/2" X 45°	6.50	35	15.0	22.8	9.5	7.1	26.0"
AR4045EL00	4" X 45°	9.60	35	16.0	29.2	12.1	10.5	33.5"
AR5045EL00	5" X 45°	17.20	bulk	24.0	36.1	15.0	11.2	43.0"
AR6045EL00	6" X 45°	26.40	bulk	30.0	42.9	17.8	12.8	48.0"

Calconduit

12021 Woodruff Ave., Downey, CA 90241

Ph: (562) 803.4388 Ph: (800) 225.7473 Fax: (562) 803.4488 | calconduit.com

