

Calconduit™

Rigid Conduit, Rigid & EMT Fittings

EMT Factory Elbows - 45°

Application:

EMT elbows are to be installed on conduit raceways for the interconnection of conduit runs and other fittings.

Features:


Fabricated from UL Listed Electrical Metallic Tubing (EMT)

Certifications and Compliances:

UL & CUL Listed, UL File Number E315441, UL797 with statements of conformance, ANSI C80.3, National Electrical Code® 2008 -Article 358, A.R.R.A. Available, Federal Specification WW-C-563*

Options:

Available in any degree of bend from 5° to 90°, and special radius

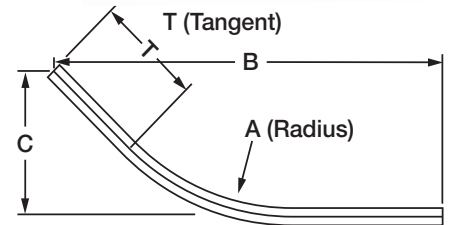

| 45° Elbows | | | | Dimensions (Inches) | | | | |
|-------------|-------------|-----------|---------|---------------------|------|------|------|------------|
| Item Number | Description | Wt. (lbs) | Box Qty | A | B | C | T | Cut Length |
| EM0545EL00 | ½" X 45° | 0.70 | 50 | 4.0 | 7.0 | 2.9 | 1.9 | 8.0 |
| EM0745EL00 | ¾" X 45° | 0.90 | 50 | 4.5 | 7.4 | 3.0 | 2.0 | 9.0 |
| EM1045EL00 | 1" X 45° | 1.60 | 25 | 5.8 | 9.5 | 4.0 | 2.7 | 10.0 |
| EM1245EL00 | 1-¼" X 45° | 2.90 | 20 | 7.3 | 13.1 | 5.4 | 4.3 | 15.5 |
| EM1545EL00 | 1-½" X 45° | 3.80 | 15 | 8.3 | 14.0 | 5.8 | 4.3 | 16.5 |
| EM2045EL00 | 2" X 45° | 5.40 | 10 | 9.5 | 16.1 | 6.6 | 5.4 | 18.5 |
| EM2545EL00 | 2-½" X 45° | 10.80 | 50 | 10.5 | 19.0 | 7.9 | 6.8 | 22.5 |
| EM3045EL00 | 3" X 45° | 14.70 | 35 | 13.0 | 20.5 | 8.5 | 6.7 | 23.5 |
| EM3545EL00 | 3-½" X 45° | 19.50 | 35 | 15.0 | 22.8 | 9.5 | 7.1 | 26.0 |
| EM4045EL00 | 4" X 45° | 29.30 | 35 | 16.0 | 29.2 | 12.1 | 10.5 | 33.5 |

Calconduit

12021 Woodruff Ave., Downey, CA 90241

Ph: (562) 803.4388 Ph: (800) 225.7473 Fax: (562) 803.4488 | calconduit.com

