

Calconduit™

Rigid Conduit, Rigid & EMT Fittings

Galvanized Rigid Special Radius 45° Sweeps

Application:

Galvanized Rigid Conduit (GRC) Elbows are to be installed on conduit raceways for underground stub-ups, and interconnection of conduit runs and other fittings.

Features:


- Fabricated from UL listed hot-dipped galvanized rigid conduit
- Threaded ends (NPT)

Certifications and Compliances:

- UL & CUL Listed - UL6
- UL File Number E226472
- UL6 with statements of conformance
- ANSI C80.1
- CalTrans Specification 86-2.05
- A.R.R.A. Available
- ASTM A239

Options:

Available in any degree of bend from 5° to 90°, and special radius

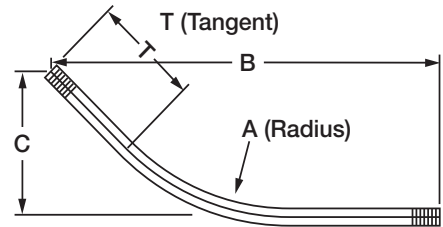

All dimensions are for informational purposes only
*Tolerances +/-5%

12" - 18"										
Radius										
A	12 Inch					18 Inch				
Size	Item Number	B	C	T	Wt.	Item Number	B	C	T	Wt.
½"	ST0512SW45	24	10	10	2.10	ST0518SW45	30	12.5	11	2.50
¾"	ST0712SW45	24	10	10	2.50	ST0718SW45	30	12.5	11	3.30
1"	ST1012SW45	24	10	10	3.60	ST1018SW45	30	12.5	11	4.20
1-¼"	ST1212SW45	24	10	10	5.50	ST1218SW45	30	12.5	11	6.10
1-½"	ST1512SW45	24	10	10	8.00	ST1518SW45	30	12.5	11	8.00
2"						ST2018SW45	30	12.5	11	10.00
2-½"						ST2518SW45	30	12.5	11	15.00
3"						ST3018SW45	30	12.5	11	20.00
3-½"						ST3518SW45	30	12.5	11	22.50

Calconduit™

Rigid Conduit, Rigid & EMT Fittings

Galvanized Rigid Special Radius 45° Sweeps

All dimensions are for informational purposes only
*Tolerances +/-5%

24" - 30" - 36"															
Radius															
A	24 Inch					30 Inch					36 Inch				
Size	Item Number	B	C	T	Wt.	Item Number	B	C	T	Wt.	Item No	B	C	T	Wt.
½"	ST0524SW45	36	15	11	2.90	ST0530SW45	40	17	11	3.30	ST0536SW45	44	18.5	11	3.60
¾"	ST0724SW45	36	15	11	3.80	ST0730SW45	40	17	11	4.40	ST0736SW45	44	18.5	11	4.70
1"	ST1024SW45	36	15	11	6.40	ST1030SW45	40	17	11	7.00	ST1036SW45	44	18.5	11	6.20
1-¼"	ST1224SW45	36	15	11	8.00	ST1230SW45	40	17	11	9.00	ST1236SW45	44	18.5	11	9.00
1-½"	ST1524SW45	36	15	11	9.20	ST1530SW45	40	17	11	9.60	ST1536SW45	44	18.5	11	11.00
2"	ST2024SW45	36	15	11	12.00	ST2030SW45	40	17	11	14.00	ST2036SW45	44	18.5	11	14.00
2-½"	ST2524SW45	36	15	11	15.00	ST2530SW45	40	17	11	22.00	ST2536SW45	44	18.5	11	22.00
3"	ST3024SW45	36	15	11	25.00	ST3030SW45	40	17	11	27.00	ST3036SW45	44	18.5	11	29.00
3-½"	ST3524SW45	36	15	11	28.60	ST3530SW45	40	17	11	29.30	ST3536SW45	44	18.5	11	35.00
4"	ST4024SW45	36	15	11	34.00	ST4030SW45	40	17	11	41.00	ST4036SW45	44	18.5	11	42.00
5"											ST5036SW45	44	18.5	11	60.00
6"											ST6036SW45	44	18.5	12	121.00

42" - 48" - 60"															
Radius															
A	42 Inch					48 Inch					60 Inch				
Size	Item Number	B	C	T	Wt.	Item Number	B	C	T	Wt.	Item No	B	C	T	Wt.
½"	ST0542SW45	50	21	12	3.90	ST0548SW45	54.5	22.5	12	4.20	ST0560SW45	62	26	12	4.90
¾"	ST0742SW45	50	21	12	5.20	ST0748SW45	54.5	22.5	12	5.60	ST0760SW45	62	26	12	6.40
1"	ST1042SW45	50	21	12	7.60	ST1048SW45	54.5	22.5	12	8.30	ST1060SW45	62	26	12	9.50
1-¼"	ST1242SW45	50	21	12	10.40	ST1248SW45	54.5	22.5	12	11.30	ST1260SW45	62	26	12	12.90
1-½"	ST1542SW45	50	21	12	12.50	ST1548SW45	54.5	22.5	12	13.60	ST1560SW45	62	26	12	15.60
2"	ST2042SW45	50	21	12	16.60	ST2048SW45	54.5	22.5	12	18.10	ST2060SW45	62	26	12	20.70
2-½"	ST2542SW45	50	21	12	26.60	ST2548SW45	54.5	22.5	12	28.90	ST2560SW45	62	26	12	33.10
3"	ST3042SW45	50	21	12	35.70	ST3048SW45	54.5	22.5	12	38.80	ST3060SW45	62	26	12	44.40
3-½"						ST3548SW45	54.5	22.5	12	45.50	ST3560SW45	62	26	12	52.10
4"						ST4048SW45	54.5	22.5	12	53.20	ST4060SW45	62	26	12	60.90
5"						ST5048SW45	54.5	22.5	12	72.30	ST5060SW45	62	26	12	82.80
6"						ST6048SW45	54.5	22.5	12	93.00	ST6060SW45	62	26	12	106.50