

Calconduit™

Rigid Conduit, Rigid & EMT Fittings

Galvanized Rigid Yard Elbows

Application:

Galvanized Rigid Conduit (GRC) Yard Elbows are to be installed on conduit raceways for underground stub-ups, and interconnection of conduit runs and other fittings.

Features:


- Fabricated from UL listed hot-dipped galvanized rigid conduit
- Threaded ends (NPT)

Certifications and Compliances:

- UL & CUL Listed - UL6
- UL File Number E226472
- UL6 with statements of conformance
- ANSI C80.1
- CalTrans Specification 86-2.05
- A.R.R.A. Available
- ASTM A239

Options:

Available in custom stub lengths and custom degree of bend

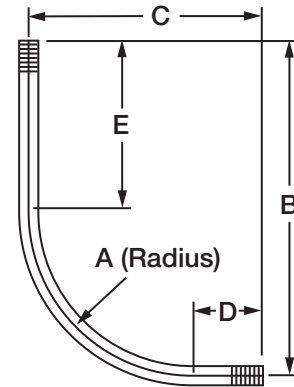

Item Number	Description	Wt. (lbs)	Dimensions (Inches)				
			A	B	C	D	E
ST0590YL00	½" X 90°	1.40	4.00	18.00	6.19	2.19	14.00
ST0790YL00	¾" X 90°	1.90	4.50	18.00	6.75	2.25	13.50
ST1090YL00	1" X 90°	3.00	5.75	18.00	8.63	2.88	12.25
ST1290YL00	1-¼" X 90°	4.80	7.25	19.25	10.25	3.25	12.25
ST1590YL00	1-½" X 90°	6.30	8.25	20.50	11.63	3.38	12.25
ST2090YL00	2" X 90°	9.00	9.50	21.50	14.50	5.00	12.00
ST2590YL00	2-½" X 90°	14.50	10.50	22.50	16.00	5.50	12.00
ST3090YL00	3" X 90°	21.20	13.00	25.00	19.25	6.25	12.00
ST3590YL00	3-½" X 90°	28.30	15.00	27.00	22.75	7.75	12.00
ST4090YL00	4" X 90°	35.00	16.00	28.00	24.00	8.00	12.00

Calconduit

12021 Woodruff Ave., Downey, CA 90241

Ph: (562) 803.4388 Ph: (800) 225.7473 Fax: (562) 803.4488 | calconduit.com

